

Product datasheet

Specifications



TSX Micro - 2 analogue output +/- 10 V, 0-20, 4-20 mA

TSXASZ200

Main

Range of product	Modicon TSX Micro automation platform
Product or component type	Analog output module
Number of channels	2
Analogue output type	0...20 mA or 4...20 mA +/- 10 V

Complementary

Analog/Digital conversion	11 bits + sign 0...20 mA or 4...20 mA 11 bits +/- 10 V
Measurement resolution	0...20 mA or 4...20 mA +/- 10 V
Output load	<= 0.6 Ohm 0...20 mA or 4...20 mA >= 1 Ohm +/- 10 V
Protection type	Open-circuit 0...20 mA or 4...20 mA
Temperature drift	0.107 %/10 °C 0...20 mA or 4...20 mA 0.083 %/10 °C +/- 10 V
Current consumption	150 mA
Isolation voltage	1500 V AC
Net weight	0.2 kg

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	5.5 cm
Package 1 Width	18.0 cm
Package 1 Length	26.0 cm
Package 1 Weight	636.0 g
Unit Type of Package 2	S03
Number of Units in Package 2	8
Package 2 Height	30.0 cm
Package 2 Width	30.0 cm
Package 2 Length	40.0 cm

Package 2 Weight	5.088 kg
------------------	----------

Offer Sustainability

EU RoHS Directive	Not applicable, out of EU RoHS legal scope
-------------------	--


China RoHS Regulation	China RoHS declaration
-----------------------	--

WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins
------	---

Contractual warranty

Warranty	12 months
----------	-----------

Wiring Diagram

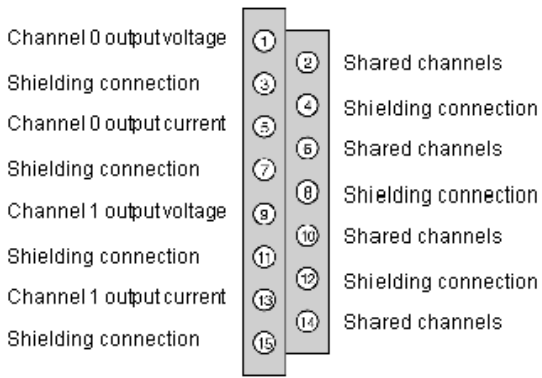

Recommended replacement(s)