

# Product data sheet

Specifications



## Unity processor - 2 racks (12 slots) / 4 racks (4/6/8 slots) - 1650 mA, 5 V DC

TSXP571634M

! Discontinued on: 31 December 2018

! To be end-of-service on: 31 December 2026

! Discontinued - Service only

### Main

Range of product	Modicon Premium Automation platform
Product or component type	Unity processor
Software designation	Unity Pro

### Complementary

Number of racks	2 12 slots 4 4/6/8 slots
Number of slots	24 16 32
Discrete I/O processor capacity	512 I/O
Analogue I/O processor capacity	24 I/O
Number of application specific channel	8
Integrated connection type	Non isolated serial link 2 female mini DIN connector (RS485) (19.2 kbit/s) Ethernet TCP/IP RJ45 connector
Port Ethernet	10BASE-T/100BASE-TX
Communication module processor capacity	2 1
Memory description	Internal RAM (with PCMCIA card) 224 kB program Internal RAM (with PCMCIA card) 96 kB data Internal RAM (without PCMCIA card) 96 kB program and data PCMCIA card 256 kB additional data storage
Maximum size of object areas	32 kB (elementary and derived data) unlocated internal data 4096 %Mi located internal bits 64 %KWi constant words located internal data 64 %MWi internal words located internal data 64 kB (DFB and EFB function blocks) unlocated internal data
Application structure	1 master task 1 fast task 32 event tasks
Execution time per instruction	0.19 µs Boolean without PCMCIA card 0.25 µs Boolean with PCMCIA card 0.25 µs word or fixed-point arithmetic without PCMCIA card 0.5 µs word or fixed-point arithmetic with PCMCIA card 1.75...2.6 µs floating points with PCMCIA card 1.75...2.6 µs floating points without PCMCIA card
Number of instructions per ms	2.1 Kinst/ms 65 % Boolean + 35 % fixed arithmetic with PCMCIA card 3.1 Kinst/ms 100 % Boolean with PCMCIA card 3.71 Kinst/ms 65 % Boolean + 35 % fixed arithmetic without PCMCIA card

<b>System overhead</b>	0.3 ms for fast task 1 ms for master task
<b>Marking</b>	CE
<b>Local signalling</b>	1 LED (green) for Ethernet TCP/IP port ready (RUN) 1 LED (green) for processor running (RUN) 1 LED (red) for collision detection (COL) 1 LED (red) for Ethernet TCP/IP port fault (ERR) 1 LED (red) for I/O module or configuration fault (I/O) 1 LED (red) for processor or system fault (ERR) 1 LED (yellow) for activity on TER or AUX terminal port (TER) 1 LED (yellow) for Ethernet link diagnostics (STS) 1 LED (yellow) for reception activity (RX) 1 LED (yellow) for transmission activity (TX)
<b>Current consumption</b>	1650 mA at 5 V DC
<b>Module format</b>	Double
<b>Net weight</b>	0.74 kg

## Environment

<b>Standards</b>	89/336/EEC CSA C22.2 No 213 Class I Division 2 Group A UL 508 CSA C22.2 No 213 Class I Division 2 Group D 73/23/EEC CSA C22.2 No 213 Class I Division 2 Group C IEC 61131-2 93/68/EEC 92/31/EEC CSA C22.2 No 213 Class I Division 2 Group B CSA C22.2 No 142
<b>Product certifications</b>	GL RMRS LR ABS DNV RINA BV
<b>Ambient air temperature for operation</b>	0...60 °C
<b>Ambient air temperature for storage</b>	-25...70 °C
<b>Relative humidity</b>	10...95 % without condensation for operation 5...95 % without condensation for storage
<b>Operating altitude</b>	0...2000 m
<b>Protective treatment</b>	TC
<b>IP degree of protection</b>	IP20
<b>Pollution degree</b>	2

## Packing Units


<b>Unit Type of Package 1</b>	PCE
<b>Number of Units in Package 1</b>	1
<b>Package 1 Height</b>	9.5 cm
<b>Package 1 Width</b>	18.0 cm
<b>Package 1 Length</b>	26.0 cm
<b>Package 1 Weight</b>	760.0 g

## Contractual warranty

<b>Warranty</b>	18 months
-----------------	-----------

**Standard and Extendable Racks for Modules Mounting**

**Dimensions of Modules and Racks**

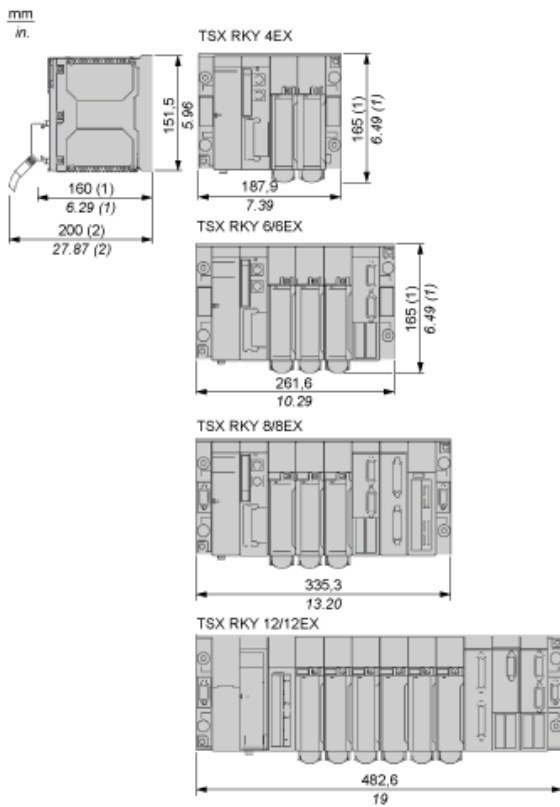

- (1) With screw terminal block modules.
- (2) Maximum depth for all types of modules and their associated connectors.

**Recommended replacement(s)**

TSXP571634M is replaced by:

1x



Standalone processor, Modicon M580, 4MB, 61 Ethernet devices, 4 Local I/O racks (1024 Digital, 256 Analog)

BMEP581020